

The CRL Series combines maintenance innovations with performance and dependability into a specification grade steel enclosure for recessed T-bar ceiling applications.

FEATURES

- Standard tool-less front battery accessibility for ease of maintenance
- Isolated battery compartment for safe installation and maintenance
- Hinged door helps prevent loss or misplacement during installation and maintenance
- Patent-pending Numeric Indicator option for error-proof visual display of fault detection/status
- Fully adjustable 3.6 Watt LED lamps deliver industry-leading spacing up to 60'
- Wide lens optic option optimizes min-to-max ratio for low mounting height applications
- Enclosure constructed of rugged 20 gauge steel
- White finish blends seamlessly for clean, architectural appearance
- Conduit entry for flexibility in wiring
- Maintenance-free 6V NiMH battery
- Brownout, low voltage, overload and short circuit protection standard
- 90 minute emergency run time, 24 hour recharge time
- Optional Guardian Self-test/Self-diagnostics (G2)
- 120/277VAC dual primary, 50/60Hz input
- UL 924 Listed


WARRANTY

Any component that fails due to a manufacturing defect is guaranteed for five years with a separate five year pro-rated warranty on the battery. The warranty does not cover physical damage, abuse or instances of uncontrollable natural forces. See the full Exitronix warranty document for detailed information.

Model: _____ Date: _____
 Accessories: _____
 Job Name: _____ Type: _____



Tool-less hinged door for easy and safe access to isolated low voltage battery compartment.



Optional Numeric Indicator (G2-NI) for dependable visual status and fault detection.



ORDERING INFORMATION Example: CRL-8-REN1-2-G2

Series	Wattage	Lamp Heads	# of Lamps	Options (Factory Installed)
CRL = 6 Volt NiMH	8 = 8 Watt	REN1 ¹ = PAR18 Renegade 3.6W LED REN3M = PAR16 Renegade MAX 3.6W LED	2 = 2 Lamps	G2 ² = Self-test/Self-diagnostics with LED Indicator G2-NI ³ = Self-test/Self-diagnostics with Numeric Indicator WL = Wide Lens, 58° Viewing Angle
Notes				Accessories⁴ (Field Installed)
¹ Only REN1 lamps are compatible with non G2 options				WG-7 = Wire Guard (Back mount)
² REN1 lamps only				XG-EL90 = Poly Guard (Back mount)
³ REN3M lamps only				
⁴ Order as separate line item				

CONSTRUCTION

The CRL Series features die-formed 20 gauge steel housings with epoxy powder coat in a standard white finish. T-bar ceiling mounting brackets provided at each end of the unit. Hinged battery access door with captive thumb screw provide tool-less battery access. Low voltage battery compartment isolated from line voltage for safe battery access. A velcro battery strap is included as an additional safety feature.

ILLUMINATION

Two fully adjustable 3.6 Watt LED lamp heads with 12° narrow beam standard optic maximize light delivered to the path of egress. Renegade REN1 PAR18 lamp heads are standard for all configurations except the G2-NI option. Only Renegade REN3M PAR16 lamp heads are compatible with G2-NI option. A 58° wide beam lens optic (option WL) optimizes min-to-max ratio for lower mounting heights or shorter paths of egress.

ELECTRICAL

Input

Dual-voltage input 120 or 277VAC at 50/60Hz

Nickel Metal Hydride Battery – NiMH

Exitronix 6V nickel metal hydride batteries are maintenance-free with a life expectancy of 15 years. NiMH batteries perform optimally in temperatures ranging from 32°F to 104°F (0°C to 40°C). NiMH batteries are more environmentally-friendly than traditional NiCad or lead calcium alternatives as they contain no cadmium or lead.

Emergency

The CRL series will operate for 90 minutes during a loss of power with a 24 hour maximum recharge time for the battery.

Brownout Circuit

The brownout circuit monitors the line voltage. As the line voltage sags and can no longer provide adequate voltage, the emergency lighting circuit will turn on to supply power to the emergency lamps for 90 minutes until the line voltage is restored.

Low Voltage Disconnect

Low Voltage Disconnect (LVD) measures the battery terminal voltage. The LVD continuously monitors the battery terminal voltage and if it should fall below a preset voltage threshold, the LVD will disconnect the load. When the battery is recharging and voltage is raised above another preset voltage threshold, the load is automatically reconnected.

Overload and Short-Circuit Protection

The overload monitoring system is a solid state circuit which monitors the lamp load and disconnects from the battery shall an overload or short circuit occur. The overload current protection eliminates the need for fuses or circuit breakers for the DC load.


Test Button

The test button is easy to locate and provides manual verification of the transfer circuit and emergency lamps.

INSTALLATION

Easily mounted with T-bar mounting bracket located on each side of the unit that aligns the unit onto the T-bar grid. Various chain holes can also be accessed to chain mount the unit to secure points above the ceiling. Conduit entry in enclosure provides wiring flexibility.

DIMENSIONS

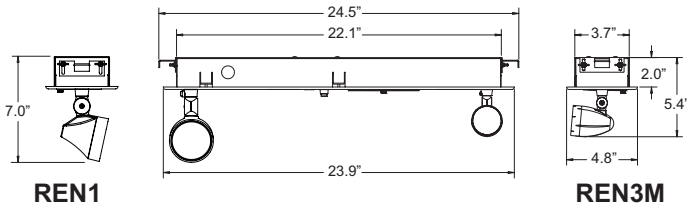

Guardian Self-test/Self-diagnostics (G2)

The Guardian circuit continuously monitors the operating condition of the AC power, battery supply voltage, emergency lamp continuity and charging circuit.

The purpose of this option is to provide visual signaling in response to a fault at the EXIT sign battery and/or battery charger. If a failure is detected, visual status will occur immediately via LED indicators or the optional numeric indicator (G2-NI). The code will display until the fault is corrected.

The Guardian circuit also monitors the transfer circuit as well as performing automatic code compliant testing. The Guardian circuit will perform a 90 minute self-test every 180 days. A five minute manual test can be initiated by the user.

CONFORMANCE TO CODES AND STANDARDS

The CRL Series meets or exceeds NEC requirements and NFPA 101. The CRL complies with LEVEL 1 of the American Recovery and Reinvestment Act of 2009 (ARRA) requirements.

SAMPLE PHOTOMETRICS

Using multiple units mounted at a typical 7.5' height delivers 60' center-to-center spacing on a 6' wide egress path.

