

DESCRIPTION

The AXL Series is a group of architectural LED luminaires designed to illuminate parking areas, pathways, building facades, loading docks, and a wide variety of other large, general site lighting applications. Multiple mounting options make the AXL-230 a versatile luminaire for flood lighting, pole, ground and wall-mounted area lighting. The AXL is the ideal choice with efficacies up to 122 LPW to maximize energy savings and utility rebates.

SPECIFICATIONS

Construction:

- Die-cast aluminum housing with durable, dark bronze powder coat finish
- Wireway enclosure is sealed with a water-tight, silicon rubber gasket

Optics/ LEDs:

- UV stabilized polycarbonate lenses available in a Type III and a symmetrical wide distribution (NEMA 7H x 7V)
- Available in 4000K (neutral white) and 5000K (cool white)
- Long-Life LEDs provide 69,000 hours of operation with at least 70% of initial lumen output (L70)
- Color rendering index > 80

Electrical:

- Universal 120-277VAC, 50/60Hz, 1-10V dimming drivers
- Power factor > 0.90
- Total harmonic distortion < 20%

Installation:

- Easy installation in new construction or retrofit applications
- Trunnion mount is standard
- Threaded receptacle (1/2" NPS) for external pencil photocell accessory
- Die-cast arm and slip-fitters provide additional photocell mounting options

Accessories (Sold separately for field installation):

- Die-cast slip-fitter mount provides attachment to poles (2 3/8" O.D. tenon)
- Die-cast arm mount provides secure attachment to flat surface
- 120VAC and 277VAC external pencil photocell for dusk to dawn control

Testing & Compliance:

- UL Listed for Wet Locations
- Operating temperatures: -30°C to 40°C (-22°F to 104°F)
- IP65 rated
- DesignLights Consortium® (DLC) Qualified (See QPL for listed models)
- Complies with EN6100-4-5 surge immunity (1kVA)

Effective projected areas (EPAs) are:

- Front = 0.37 square feet
- Side = 0.51 square feet
- Face = 1.74 square feet

Warranty:

- Five (5) year warranty (terms and conditions apply)

Note: Environment and application will affect actual performance. Typical values and 25°C used for testing. Specifications subject to change without notice.

Ordering Information (Example: AXL-230-5-4K-T)

Series	Distribution	Color Temperature (CCT) ¹	Mount	Accessories ² (Field Installed)
AXL-230	Blank = Wide 3 = Type III	4K = 4000 Kelvin 5K = 5000 Kelvin	T = Trunnion	AXL-A-BR ³ = Die-cast Arm AXL-SF-BR ^{3,4} = Die-cast Slip-Fitter PCE1 = 120VAC External Pencil Photocell PCE2 = 277VAC External Pencil Photocell

¹ 3000K CCT built to order - contact factory for details.

² Order as separate line item. Shipped in separate box for final installation in field.

³ Both the arm & slip-fitter provide knockouts for additional sensor options.

⁴ DLC Qualified pointing straight down

Model: _____ Date: _____
 Accessories: _____
 Job Name: _____ Type: _____

Available While Supplies Last



Standard Trunnion Mount




Specs At A Glance*	
Wattage (W)	230
CCT (K)	4000K 5000K
Distribution	Type III, Wide Distribution (NEMA 7H X 7V)
Lumens (lm)	26,219 26,731
Equivalency	750W HID
Efficacy (LPW)	117 122
CRI	> 80
Input Voltage	120 - 277VAC, 50/60Hz
Operating Temp	-30°C to 40°C (-22°F to 104°F)
Certifications	UL Listed for Wet Locations, DLC, IP65
Warranty	5 Years
Weight	17.3 lbs

* Nominal Wattage

Sample Photometry

(Example: AXL-230-5-5K-T)

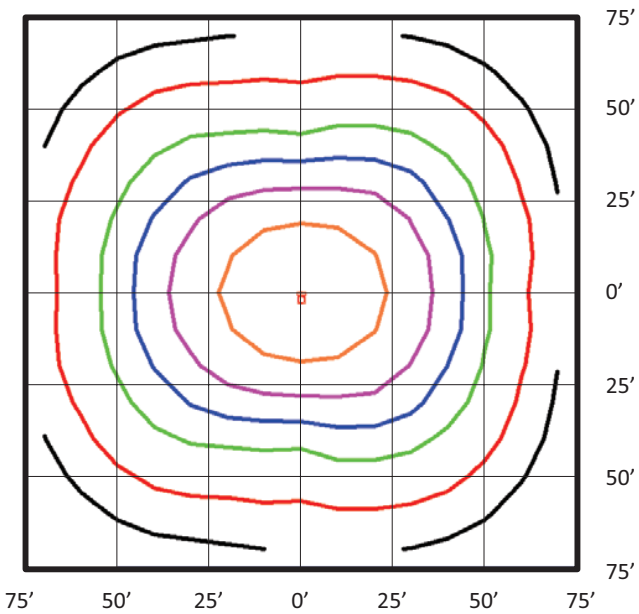


Foot Candles



Notes

- ¹ Isofootcandle plots depict initial footcandles at grade.
- ² Gridlines represent units of mounting height of 25 feet.

Dimensions

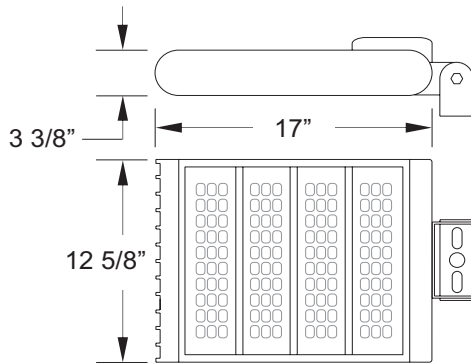

Weight: 17.3 lbs.

Mounting Accessories



AXL-A-BR
Die-cast Arm



AXL-SF-BR
Die-cast Slip-Fitter

BUG Rating: B4-U3-G3

Zone	Lumens	Percentage
FL = Front - Low (0-30)	3,443	13%
FM = Front - Medium (30-60)	7,129	27%
FH = Front - High (60-80)	2,667	10%
FVH = Front - Very High (80-90)	284	1%
Total Forward Light	13,523	51%

Zone	Lumens	Percentage
BL = Back - Low (0-30)	3,360	13%
BM = Back - Medium (30-60)	7,019	26%
BH = Back - High (60-80)	2,484	9%
BVH = Back - Very High (80-90)	271	1%
Total Back Light	13,135	49%

Zone	Lumens	Percentage
UL = Up Light - Low (90-100)	5	0%
UH = Up Light - High (100-180)	69	0%
Total Up Light	73	0%

Total Lumens 26,731 100%

Specifications are subject to change without notice.
Installation must be performed in accordance with
Barron Lighting Group installation instructions.

10810341 Rev 2 11/18