

**DESCRIPTION**

The AXL Series is a group of architectural LED flood/area luminaires designed to illuminate parking areas, pathways, building facades, loading docks, and a wide variety of other large, general site lighting applications. Yoke and knuckle mount options make the AXL-30 a versatile luminaire for general outdoor flood lighting requirements. The AXL is the ideal choice with efficacies up to 126 LPW to maximize energy savings and utility rebates.

**SPECIFICATIONS**

**Construction:**

- Die-cast aluminum housing with durable, dark bronze powder coat finish
- Wireway enclosure is sealed with a water-tight, silicon rubber gasket

**Optics/ LEDs:**

- UV stabilized polycarbonate lens delivers wide symmetrical (NEMA 7H x 7V) distribution
- Available in 3000K (warm white), 4000K (neutral white) and 5000K (cool white)
- Long-Life LEDs provide 69,000 hours of operation with at least 70% of initial lumen output (L70)
- Color rendering index > 80

**Electrical:**

- Universal 120-277VAC, 50/60Hz
- Power factor > 0.90
- Total harmonic distortion < 20%

**Installation:**

- Easy installation in new construction or retrofit applications
- Yoke-mount provides secure attachment to flat surfaces
- Aluminum die-cast knuckle-mount includes 1/2" NPS stem with locking nut for installation on a junction box

**Testing & Compliance:**

- UL Listed for Wet Locations
- DesignLights Consortium® (DLC) Qualified (See QPL for listed models)
- Operating temperatures: -30°C to 40°C (-22°F to 104°F)
- IP65 rated
- Complies with EN6100-4-5 surge immunity (1kVA)

**Effective projected areas (EPAs) are:**

- Front = 0.09 square feet
- Side = 0.07 square feet
- Face = 0.29 square feet

**Warranty:**

- Five (5) year warranty (terms and conditions apply)

**Note:** Environment and application will affect actual performance. Typical values and 25°C used for testing. Specifications subject to change without notice.

Model: \_\_\_\_\_ Date: \_\_\_\_\_  
 Accessories: \_\_\_\_\_  
 Job Name: \_\_\_\_\_ Type: \_\_\_\_\_

**Available While Supplies Last**



Yoke-Mount Option



Knuckle-Mount Option



Specs At A Glance*			
Wattage (W)	30		
CCT (K)	3000K	4000K	5000K
Distribution	Wide (Nema 7H x 7V)		
Lumens (lm)	3,453	3,586	3,718
Equivalency	100-150W HID		
Efficacy (LPW)	117	121	126
CRI	> 80		
Input Voltage	120 - 277VAC, 50/60Hz		
Operating Temp	-30°C to 40°C (-22°F to 104°F)		
Certifications	UL Listed for Wet Locations, IP65, DLC		
Warranty	5 Years		
Weight	2.6 lbs.		

\*Nominal Wattage


**Ordering Information** (Example: AXL-30-3K-Y)

Series	Color Temperature (CCT)	Mount
AXL-30	3K = 3000 Kelvin	K = Knuckle
	4K = 4000 Kelvin	Y = Yoke
	5K = 5000 Kelvin	

### Sample Photometry

(Example: AXL-30-5K-Y)

**BUG Rating: B1-U1-G0**

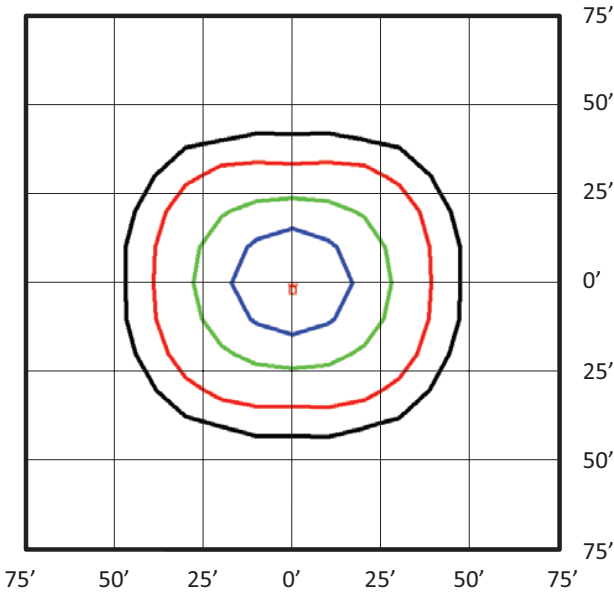

Zone	Lumens	Percentage
FL = Front - Low (0-30)	458	12%
FM = Front - Medium (30-60)	1,025	28%
FH = Front - High (60-80)	326	9%
FVH = Front - Very High (80-90)	34	1%
<b>Total Forward Light</b>	<b>1,843</b>	<b>50%</b>

Zone	Lumens	Percentage
BL = Back - Low (0-30)	466	13%
BM = Back - Medium (30-60)	1,041	28%
BH = Back - High (60-80)	330	9%
BVH = Back - Very High (80-90)	34	1%
<b>Total Back Light</b>	<b>1,871</b>	<b>50%</b>

Zone	Lumens	Percentage
UL = Up Light - Low (90-100)	1	0%
UH = Up Light - High (100-180)	4	0%
<b>Total Up Light</b>	<b>4</b>	<b>0%</b>

**Total Lumens** 3,718 100%


#### Foot Candles

- 5.0
- 2.0
- 1.0
- 0.5
- 0.2
- 0.1

#### Notes

- <sup>1</sup> Isofootcandle plots depict initial footcandles at grade.
- <sup>2</sup> Gridlines represent units of mounting height of 25 feet.

### Dimensions

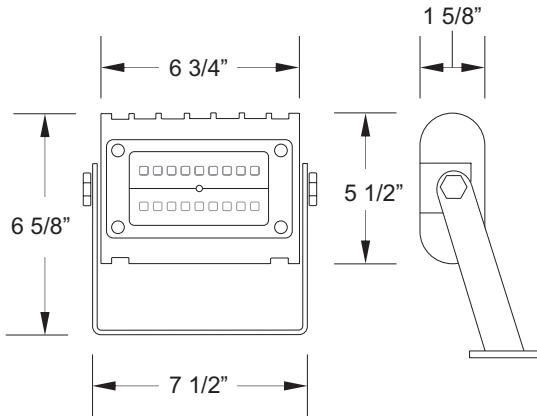

**Weight: 2.6 lbs.**

Specifications are subject to change without notice. Installation must be performed in accordance with Barron Lighting Group installation instructions.

10810336 Rev 3 11/18