

DESCRIPTION

4" Gimbal trim with integrated LED power supply and thermal management system. Designed to fit most standard 4" recessed cans.

SPECIFICATIONS

Construction:

- Durable white thermoplastic construction
- E26 medium screw-base Edison connector provides easy retrofit of incandescent housings

Optics/ LEDs:

- Long-life LEDs with up to 50,000 hours at 70% lumen maintenance
- Choice of 2700K (±145), 3000K (±175), or 4000K (±275) color temperature with 80 CRI
- Produces 675-750 lumens
- Uses high power, high quality LEDs

Electrical:

- LED driver dimmable down to 10% with most dimmers (Lutron Maestro C-L/MACL-153MR, Lutron Skylark C-L/SCL-153P, Leviton Sureslide/Cat. No.6674, Lutron/PD-6WCL, Legrand Harmony/HCL453PTCCCV6)
- Save 75% compared to incandescent sources
- Power factor ≥.90 with input
- 120V, 50/60Hz
- 10W power consumption
- Operation temperature of -20°C-40°C (-4°F-104°F)

Installation:

- Compatible with most 4" housings
- Compatible with insulated, non-insulated, and air-tight ceiling
- Easy installation with integral clips
- No tools required for installation

Testing & Compliance:

- Tested in accordance with IESNA LM79 & LM80
- ETL Listed for Wet Locations US and Canada
- Energy Star Qualified
- Passes FCC Class B
- Meets state of California Title 24 requirements

Warranty:


- Five (5) year warranty (terms and conditions apply)

Note: Environment and application will affect actual performance. Typical values and 25°C used for testing. Specifications subject to change without notice.

Model: _____ Date: _____
Accessories: _____
Job Name: _____ Type: _____



Dimensions

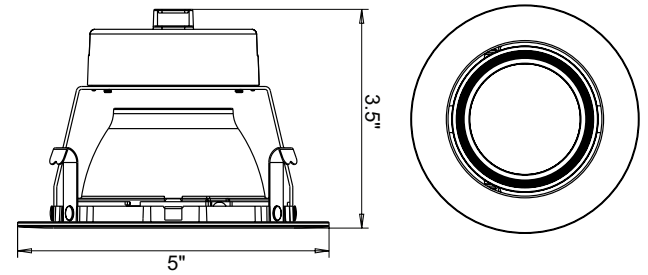

Ordering Information

SKUs	Description
BRK-LED4-GR-27K-ECO	4" LED Gimbal Trim, 2700K CCT
BRK-LED4-GR-3K-ECO	4" LED Gimbal Trim, 3000K CCT
BRK-LED4-GR-4K-ECO	4" LED Gimbal Trim, 4000K CCT