

DESCRIPTION

The Trace-lite TL103 and TL104 Series are small, economical wallpacks ideal for parking areas, entrances, walkways, underpasses, loading docks, and recreation areas.

SPECIFICATIONS

Construction:

The Trace-lite TL103/104 Series features a durable, die-cast aluminum enclosure with an architectural bronze powder coated finish. Enclosure is fully sealed and gasketed, and is Wet Location Listed for outdoor use. Enclosure and hardware are corrosion resistant. The TL103/104 features an internal, anodized aluminum reflector which provides ideal light distribution. The TL103 lamp is protected by a vandal-resistant, UV stabilized, polycarbonate prismatic refractor, while the TL104 features a high-impact, heat resistant borosilicate glass refractor.

Lamps & Ballasts

Metal Halide: BD17 type lamps 70 and 100 watts, utilizing a medium base, glazed porcelain socket pulse rated for 4kV with an HX-HPF ballast rated for a minimum operating temperature of -30°C (-22°F).

Installation:

The Trace-lite TL103/104 Series is ideal for mounting to any vertical surface and features a rugged die-cast aluminum mounting plate. Can be wired to a 4" junction box, or surface mounted using the 1/2" NPS conduit entry point.

Photocontrol (Accessory: PC):

Optional field-installed photocontrol provides dusk-till-dawn security. Input voltage must be specified to match fixture input voltage.

Listing:

The TL103/104 is suitable for wet locations.

Warranty:

Any housing component that fails due to manufacturer's defect is guaranteed for two years from time of shipment. Ballasts, Capacitors, and Igniters are warranted for one year from time of shipment. Warranty does not apply to damages caused by improper installation, abuse, fire or acts of God. Lamp is not covered by manufacturer's warranty.

Model: _____ Date: _____
Accessories: _____
Job Name: _____ Type: _____




While quantities last

Footcandle Correction

Multiply factors times the footcandle values for changes in lamp type.

Lamps	70W MH	70W MH	70W HPS
Factor	.50	.86	1.00

DIMENSIONS

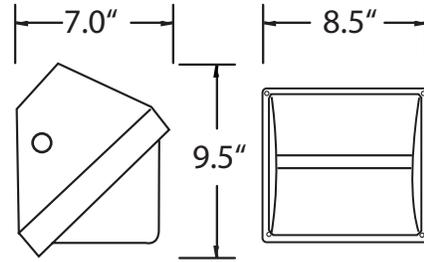

Approximate Weight: 5 lbs.

ORDERING INFORMATION

Example: TL103-MH-70-MT

Series	Lamp Type	Lamp Wattage	Input Voltage
TL103 = Polycarbonate Refractor	MH = Metal Halide	Metal Halide	MT = 120/208/240/277VAC
TL104 = Borosilicate Glass Refractor		70 = 70 Watts	
		100 ¹ = 100 Watts	
Notes	Accessories² (Field Installed)		
¹ TL104 with borosilicate glass refractor only	PC1 = 120VAC Photocontrol		
² Order as separate line item	PC2 = 208-277VAC Photocontrol		