

DESCRIPTION

The Trace-lite TL506 Series temporary work light features die-cast aluminum construction, and the lamp is protected by a steel wire guard. It is ideal for construction areas where temporary lighting is needed.

SPECIFICATIONS

Construction:

The Trace-lite TL506 Series features a durable, corrosion-resistant, die-cast aluminum ballast enclosure with an white powder coated finish. The ballast compartment features external, heat-dissipating fins to extend ballast life. The lamp is protected by a steel wire guard.

Lamps & Ballasts

Pulse Start Metal Halide: 400 watt lamp, utilizing an EX39 mogul based porcelain socket pulse rated for 4KV with a CWA ballast rated for a minimum operating temperature of -30°C (-22°F).

Installation:

The TL506 features an easy-access wiring compartment, and comes complete with mounting hook, optional pendant mount and line cord kits are also available.

Warranty:

Any housing component that fails due to manufacturer's defect is guaranteed for two years from time of shipment. Ballasts, Capacitors, and Ignitors are warrantied for one year from time of shipment. Warranty does not apply to damages caused by improper installation, abuse, fire or acts of God. Lamp is not covered by manufacturer's warranty.


Model: _____ Date: _____
Accessories: _____
Job Name: _____ Type: _____

WHILE SUPPLIES LAST




SAMPLE PHOTOMETRICS

TL506-PSMH-400 Mounted at 30'

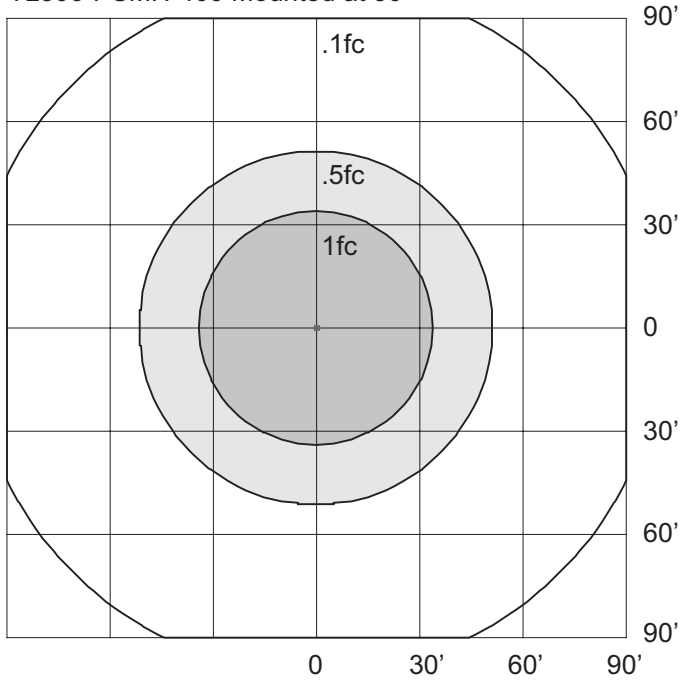

DIMENSIONS

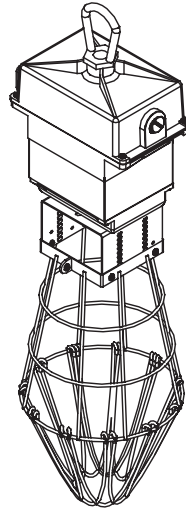

7.5" W x 4.25" D X 26" H

Approximate Weight: 10 lbs.

ORDERING INFORMATION

Example: TL506-PSMH-400-MT-OR-LC3

Series	Lamp Type	Lamp Wattage	Input Voltage	Options (Factory Installed)
TL506	PSMH = Pulse Start Metal Halide	Pulse Start Metal Halide 400 = 400 Watts	MT = 120/208/240/277VAC	OR = Open Rated (Pink) Socket LC3 = 3' Cord
				Accessories¹ (Field Installed)
				LC3277L = 3' Cord w/277V Twist Plug
				SFC500 = Safety Cable
				WG500 = Replacement Wire Guard (While Supplies Last)
Notes				LC3120 = 3' Cord with 120V Straight Blade Plug
¹ Order as separate line item				LC3120L = 3' Cord with 120V Twist Plug

Specifications are subject to change without notice. Installation must be performed in accordance with Barron Lighting Group installation instructions.