

LOW-PROFILE CENTER BASKET



Uniform illumination with
no visible LED pixilation.

DesignLights Consortium®
Premium Qualified Product.

Field installable battery packs
available for emergency egress.

140 LPW

TO MAXIMIZE
ENERGY SAVINGS



TRACE LITE
commercial & industrial lighting

barrontg.com

LASP

Low-profile Performance Center Basket

The high-performance LASP LED center basket luminaire is available in 2'x 2' and 2'x 4' sizes and offers up to 140 LPW to maximize energy savings and utility rebates. The LASP is designed to deliver general ambient lighting in a variety of indoor settings, including schools, offices, hospitals and stores, and is the perfect choice for both new construction and retrofits.




Key Features

- Easy installation in new construction or retrofit applications, fits in standard 2' x 2' or 2' x 4' grid ceilings
- Available in 3000K, 3500K, 4000K and 5000K CCT
- Efficacies up to 140 LPW maximize energy savings and utility rebates
- DesignLights Consortium® (DLC) PREMIUM Qualified
- 0-10V Dimming driver
- Surface mount kit and battery pack accessories available



Dimensions

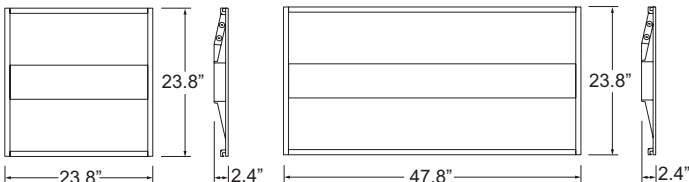

Specs At A Glance*								
Wattage (W)	32				40			
Model	LASP22 (2' x 2')				LASP24 (2' x 4')			
CCT	3000	3500	4000	5000	3000	3500	4000	5000
Lumens (lm)	4194	4293	4371	4527	5680	5743	5793	5894
Efficacy (LPW)	136	136	138	140	129	130	132	134
CRI	≥80							
Input Voltage	120 - 277VAC, 50/60Hz							
Certifications	UL Listed for Damp Locations, IC Rated, DLC PREMIUM Qualified							
Warranty	5 Years							
Operating Temp	-20°C to 40°C (-4°F to 104°F)							
Weight	6.2 lbs				12.8 lbs			

*Nominal Wattage, tested at 5000K CCT

Note: Environment and application will affect actual performance. Typical values and 25°C (77°F) used for testing. Specifications subject to change without notice.

Ordering Information Example: LASP22-32-5

Series/Wattage	CCT	Accessories ² (Field Installed)
LASP22-32' = 2' X 2' Premium Basket, 32W	3K = 3000K	LBD-5-NC-CW-C ³ = 5 Watt Battery Pack for Emergency Egress
LASP24-40' = 2' X 4' Premium Basket, 40W	35K = 3500K	LBD-7-NC-CW-C ³ = 7 Watt Battery Pack for Emergency Egress
	4K = 4000K	LBD-10-NC-CW-C ³ = 10 Watt Battery Pack for Emergency Egress
	5K = 5000K	LBD-13-NC-CW-C ³ = 13 Watt Battery Pack for Emergency Egress
		LBD-17-NC-CW-C ³ = 17 Watt Battery Pack for Emergency Egress
Notes		LP-CMK = Cable Mount Kit (6 pieces X 3')
¹ Packaged two (2) per carton		LP22-SMK ⁴ = 2' X 2' Surface Mount Kit
² Order as a separate line item; shipped in a separate box for field installation		LP24-SMK ⁴ = 2' X 4' Surface Mount Kit
³ LBD is not IC Rated. Consult the LBD spec sheet for more information		
⁴ LBD accessory not compatible with Surface Mount Kit (LPxx-SMK)		



800.533.3948 | barronltg.com

MKT-LIT-LASP 10840306 09/18