

# CHAMPIONEMW

EMERGENCY LIGHTING FOR SPECIAL REQUIREMENTS

- Made in the USA
- Fully adjustable LED or MR16 lamps
- IP66 rating - wet and hose down locations
- Optional internal battery heater for cold locations
- Guardian self-test/self-diagnostics included standard
- Vandal resistant die-cast backplate and polycarbonate lens




# CHAMPIONEMW-LED

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

## LED ORDERING INFORMATION Example: CP-EMW-8-LED-SA-WL

Series	Watts	Lamps	Finish	Options (Factory Installed)
CP-EMW	8 = 8 Watts	LED = 3.6W LED	SA = Satin Aluminum	IH1 = Internal Battery Heater 120VAC
	25 <sup>1</sup> = 25 Watts		BR = Bronze	IH2 = Internal Battery Heater 277VAC
				WL = Wide Beam 58° LEDs
				TRH = Tamper Resistant Hardware


Notes	Accessories <sup>2</sup> (Field Installed)
<sup>1</sup> Provides extended run time of 4 hours	IHB = I-Beam Mounting Bracket
<sup>2</sup> Order as separate line item	TRHT = Tamper Resistant Tool
	WG-90 = Wire Guard (Back Mount)

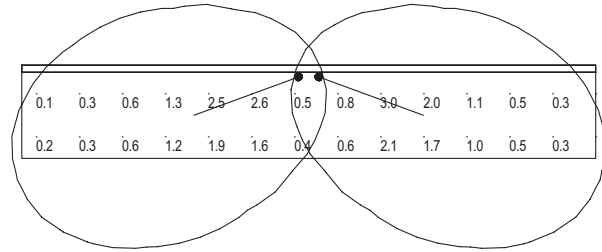

**CP-EMW-LED-58**  
**58 Degree LED**  
**40' Spacing**  
 7.5" Mounting Height  
 6' Wide Egress Path

Avg: 1.03  
 Max: 2.96  
 Min: 0.10  
 Avg/Min: 10.30  
 Max/Min: 29.60

Room Reflectance  
 Ceiling: 80  
 Walls: 50  
 Floors: 20

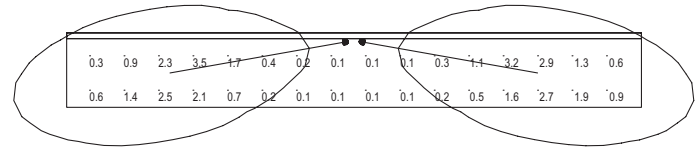

**CP-EMW-LED-12**  
**12 Degree LED**  
**50' Spacing**  
 7.5" Mounting Height  
 6' Wide Egress Path

Avg: 1.05  
 Max: 5.30  
 Min: 0.10  
 Avg/Min: 10.50  
 Max/Min: 53.00


Room Reflectance  
 Ceiling: 80  
 Walls: 50  
 Floors: 20

# CHAMPIONEMW-MR16

## MR-16 ORDERING INFORMATION Example: CP-EMW-6-25-12-SA-IH1

Series	Volts (MR16 Only)	Watts (MR16 Only)	Lamps	Finish	Options (Factory Installed)
CP-EMW	6 = 6 Volts	25 = 25 Watts	12 = 12W MR16	SA = Satin Aluminum	IH1 = Internal Battery Heater 120VAC
	12 = 12 Volts	36 = 36 Watts	20 = 20W MR16	BR = Bronze	IH2 = Internal Battery Heater 277VAC
		40 <sup>1</sup> = 40 Watts	25 = 25W MR16		TRH = Tamper Resistant Hardware
		54 <sup>2</sup> = 54 Watts			


Notes	Accessories <sup>3</sup> (Field Installed)
<sup>1</sup> Available in 6 volt only	IHB = I-Beam Mounting Bracket
<sup>2</sup> Available in 12 volt only	TRHT = Tamper Resistant Tool
<sup>3</sup> Order as separate line item	WG-90 = Wire Guard (Back Mount)

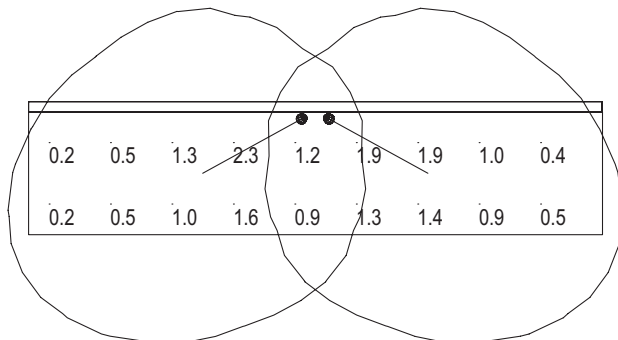

**CP-EMW-6-25-12**  
**28' Spacing**  
 7.5" Mounting Height  
 6' Wide Egress Path

Avg: 1.01  
 Max: 2.34  
 Min: 0.11  
 Avg/Min: 9.18  
 Max/Min: 21.27

Room Reflectance  
 Ceiling: 80  
 Walls: 50  
 Floors: 20

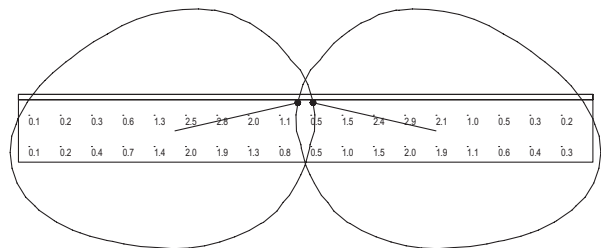

**CP-EMW-12-54-25**  
**55' Spacing**  
 7.5" Mounting Height  
 6' Wide Egress Path

Avg: 1.09  
 Max: 3.13  
 Min: 0.10  
 Avg/Min: 10.90  
 Max/Min: 31.30

Room Reflectance  
 Ceiling: 80  
 Walls: 50  
 Floors: 20